




BACK TO BLACK



**A COLOUR REVIVING
SEALER TO RESTORE
BLACK STONES AND
GRANITES**

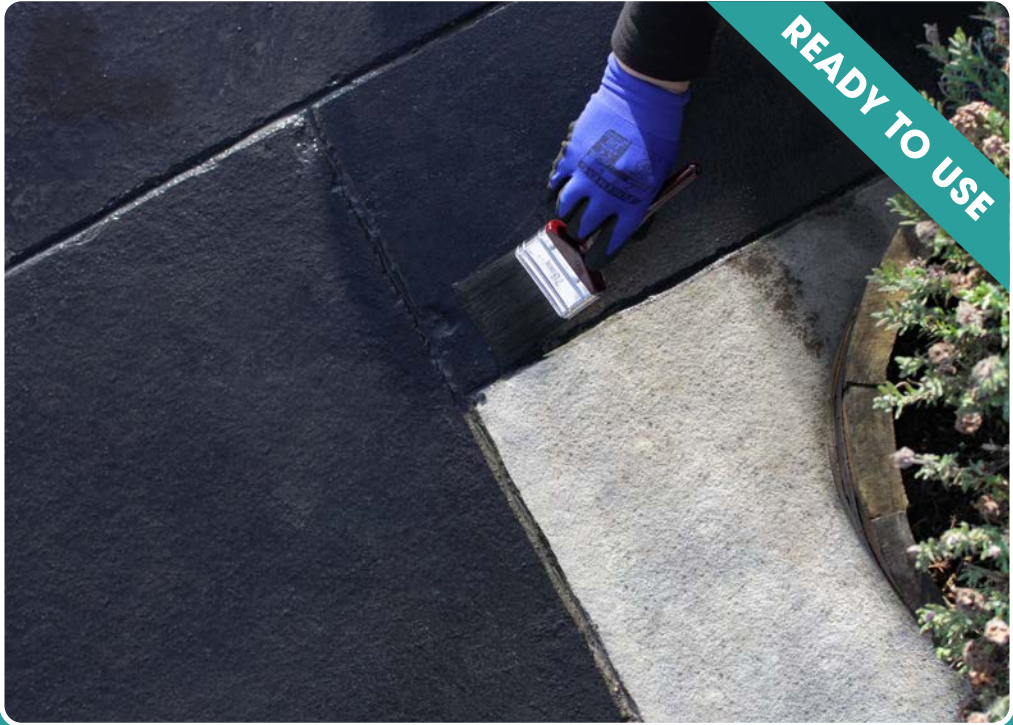

Back to Black is a high-performance, UV stable, water-based colour reviver and sealer which restores and enhances the appearance of faded black natural stone and concrete. Back to Black is especially suited for use on oxidised black limestones, black slate, black granite and concrete paving. This is a highly effective impregnating formula which provides advanced breathable protection and superior stain resistance. The treated surface remains permeable to air and water vapour giving long lasting protection. Back to Black dries with a matt finish to give an attractive intensified look. This sealer is an environmentally friendly product, completely waterborne, non-toxic, solvent and silicone free.

BENEFITS

- Delays the penetration of water and oily liquids allowing time to clean up any spillage to prevent staining
- UV resistant
- Non-flammable
- Non-toxic
- Environmentally friendly
- Non hazardous

APPLICATION

Not suitable if surfaces have been treated previously with a silicone or stearate-based water repellent.

Always test a small inconspicuous area before proceeding to ensure the finished result is satisfactory and to identify the optimum colour you wish to achieve.

Do not dilute or mix with other products.

Ensure the surface to be treated is clean, dust-free and dry before application.

Wear gloves and ensure that any surfaces not to be treated are covered and protected.

IMPORTANT: This product is a permanent staining solution that will darken the surface of the stone and the grout joints making it very difficult to remove once applied. It is an impregnating sealer that needs to fully absorb into the stone. It is not film forming, so any excess left on the surface should be removed. Do not walk on treated surfaces until the solution has completely dried.

Shake the container well before use.

Work in small areas when applying Back to Black as multiple coats may be required depending on how porous your product is and the colour you wish to achieve.

Back to Black is water based and the product must be applied until saturation is achieved to ensure 100% product efficiency. You must not let the Back to Black dry between coats, each extra coat needs to be reapplied before the previous coat dries, wet on wet. Apply a small amount to the surface and spread out evenly using a sealant applicator, foam roller or paint brush.

Do not walk on the surface for at least 4 hours after the final application. Once dry and to help ensure an even application it may be necessary to work off any visible excess using a dry towel. Allow newly treated surfaces to cure for 24 hours. If required, wash surfaces with a 1:10 dilute solution of Pavetuf Deep Cleaner. This will help to remove any excess that is difficult to rub off. Before allowing traffic gently rub the surface in a few areas with white cloth or paper towel to ensure that it is colourfast.

RECOMMENDATIONS

Do not apply during wet weather, frost or if rain is forecast. Do not use in temperatures under 5°C or over 25°C (41°F - 77°F).

Please be aware darker coloured paving will have a considerably higher surface temperature in warmer weather conditions.

This product is not designed for non-absorbent surfaces.

Empty containers are recyclable. Active ingredients are water soluble and inert once cured.

Please dispose of packaging and waste products in line with current environmental legislation.

COVERAGE PER COAT

	1LTR(33.8floz)	5LTR(169.1floz)
Medium porosity surfaces	30m ² (320 ft ²)	150m ² (1600 ft ²)

STORAGE INFORMATION

Use within 24 months from the date of manufacture.

Store in the original unopened container in a clean, dry area and ideally at 5°C - 25°C (41°F - 77°F)

HEALTH, SAFETY & ENVIRONMENTAL

KEEP OUT OF THE REACH OF CHILDREN.

Contains: 1,2-benzisothiazol-3(2H)-one; 1,2-benzisothiazolin-3-one (2634-33-5).



5060582651156



MANUFACTURED IN THE UK

Disclaimer: Pavetuf Satin Sealer, if used in accordance with the instructions provided, should produce results as described. Talasey Ltd does not offer nor imply any guarantees. No liability will be accepted from either the supplier nor the manufacturer, for changes in appearance or markings of the material on which it is used. Revised SSPL0623V1



Distributed worldwide by Talasey Ltd
www.talasey.co.uk

Before use, please read the safety data sheet available on
www.pavetuf.com

For further information or technical advice call

☎ 0330 333 8030 or ☎ (888) 240 8704